


How can I configure My Modem (Our Modems)

- ***D-link DSL 124:***
 - Connect to the Wi-Fi network of your modem (Wi-Fi 's password written on the back of the modem : MAC ID)
 - Open any browser, and enter the gateway address (the default one is 192.168.1.1)
username : admin , password : admin
 - Quick start → Setups wizard → Welcome to D-link router setup wizard (click next)



1. Choose DSL WAN (next)

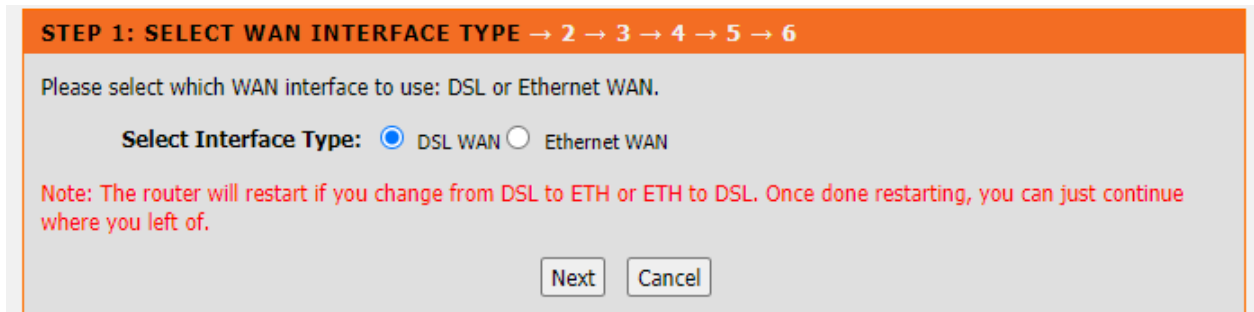

2. Changing device login password (type any password or click skip)
3. Set time and date (next)
4. Setup internet connection : country : other / internet service provider : other / protocol : PPOE / VPI : 0 for Ogero and 8 for GDS DSP / VCI : 35 / username : X123456@idm.net.lb / password : XXXXXX

1 → 2 → 3 → **STEP 4: SETUP INTERNET CONNECTION** → 5 → 6

Please select your Country and ISP (Internet Service Provider) from the list below. If your Country or ISP is not in the list, please select "Others".

Country : (Click to Select) ▼
 Internet Service Provider : Others ▼
 Protocol : PPPoE ▼
 Connection Type : LLC ▼

VPI : 0 (0-255)
 VCI : 35 (32-65535)

PPPoE

Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click "Next" to continue.

Username : Lxxx@idm.net.lb
 Password :
 Confirm Password :

Back Next Cancel

5. Configure wireless network : you change to type your network name in wireless network name SSID and you Wi-Fi's password in WPA2-prshared key

1 → 2 → 3 → 4 → **STEP 5: CONFIGURE WIRELESS NETWORK** → 6

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

Enable Your Wireless Network

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) : DLINK-2F18 (1~32 characters)

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status : Visible Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

Security Level : None WEP WPA-PSK WPA2-PSK

Security Mode: WPA-PSK
 Select this option if your wireless adapters support WPA-PSK.

Now, please enter your wireless security key.

WPA2 Pre-Shared Key : %Fortress123&
 (8-63 characters, such as a~z, A~Z, or 0~9, i.e. '%Fortress123&')

Note: You will need to enter the same key here into your wireless clients in order to enable proper wireless connection.

Back Next Cancel

6. Completed and apply, press on start button