


Hardware Overview



1. Indicator
2. Front Cover
3. Modem Cap
4. SIM/USIM card slot
5. USB Connector

Hardware Installation



1. Put your finger on the bottom finger grip, and then lift the front cover of the modem to release and remove.

Note: Do not open the front cover rudely so as to avoid the damage of the front cover.



2. Insert the SIM/USIM card into the SIM/USIM card slot.

Insert the SIM/USIM card with the metal contact area facing downwards into the slot, and then push SIM/USIM card as far as possible, as shown in the facing pictures.





3. Put the front cover of the modem flatly upon the body of modem.

Direct the front cover towards the locking catches on the sides of the modem and push the front cover of the modem to lock the front cover into its place.



4. Connect the Modem to your laptop or desktop PC.

- Plug the USB connector into your computer's USB port and make sure that it is tightly inserted.
- The OS automatically detects and recognizes new hardware and starts the installation wizard.



Software Installation Guide

The installation procedure may differ from one operating system to another.

For Windows OS

Your system will start the software setup process automatically when you connect the modem to your computer. Please follow the system prompts to complete the software installation.

Note: If the system does not launch the installation automatically, go to **My Computer > ZTEMODEM** or **Connect Manager** and double click on **Autorun.exe**




For Mac OS

The system will automatically display a **ZTEMODEM** CD-ROM icon or a **Connect Manager** CD-ROM on the desktop, when you connect the modem to your computer correctly. Double click the installation software package in the **ZTEMODEM** or **Connect Manager**, and follow the system prompts to complete the software installation.

MF190 USB Modem Quick Guide


How to configure your modem

Various icons are presented to enable quick operation of the following functions:


	Connect	Connect to the Internet.
	Settings	Set the configuration for the USB modem.
	Data records	Show the connection information.

Configuration Steps

- 1- If the USB dongle is not already inserted in the PC/Laptop, please plug it into one of the PC's empty USB ports and wait for the 3G Connection Manager to start automatically. If the software does not start automatically, please run it manually from **All Programs** (Windows) or from **Applications** (MAC).
- 2- Make sure that the SIM card is correctly inserted in the USB dongle and that you have a good signal reception as shown in the image below:

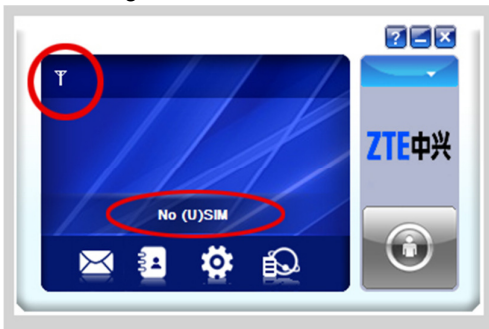

SIM Card not inserted or not correctly inserted

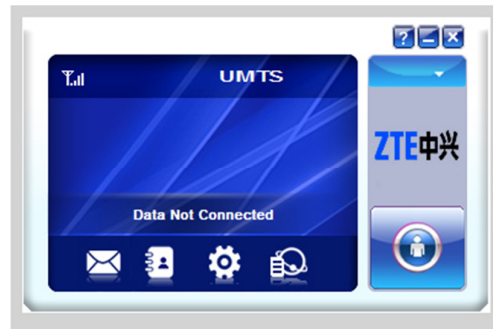


SIM card correctly inserted, signal reception is good

- 1- Click on **Settings**  as shown in the facing image:




In the Settings window under **Connection**, click on **Add** (see image below)

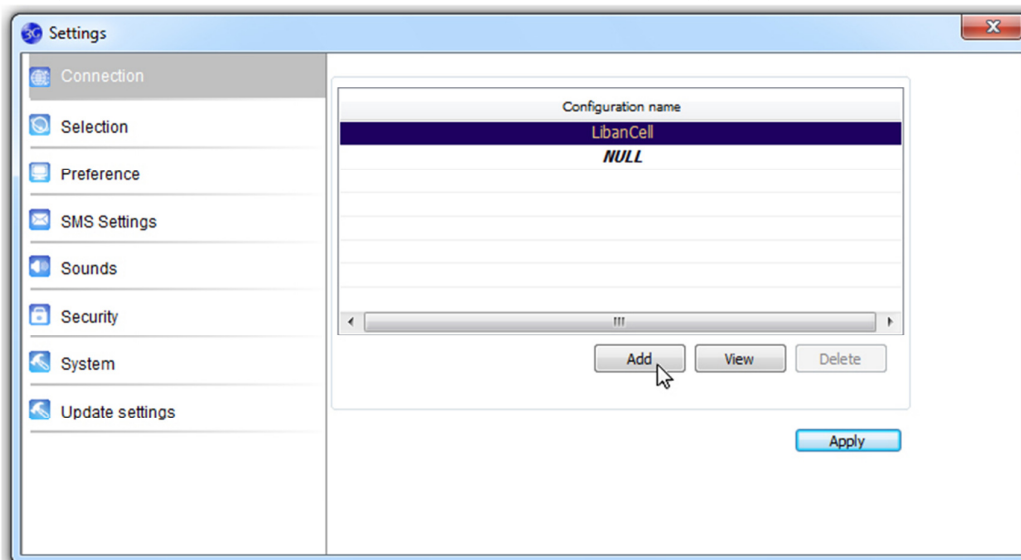

MF190 USB Modem Quick Guide

In the **Connection** window, enter the following information as shown in the image below:

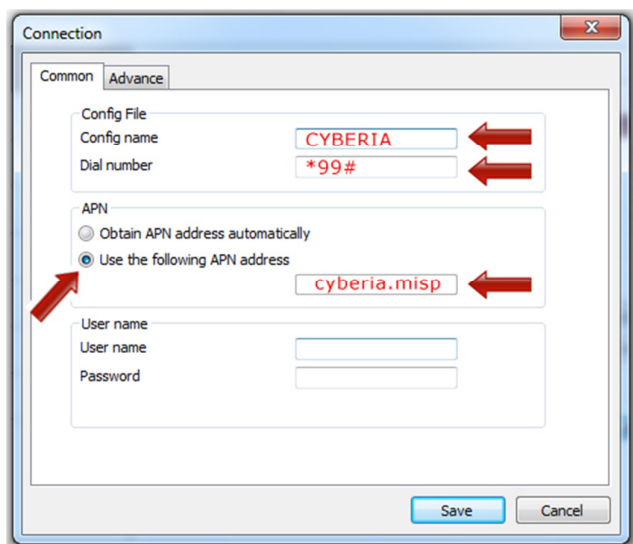


Config Name: **CYBERIA**
Dial number: ***99#**

Select "**Use the following APN address**" and enter the following: **cyberia.misp**

Leave **User name** and **Password** empty.

Click **Save**

Click on **Apply** to set the new profile as the default profile for your connection and click **OK**.

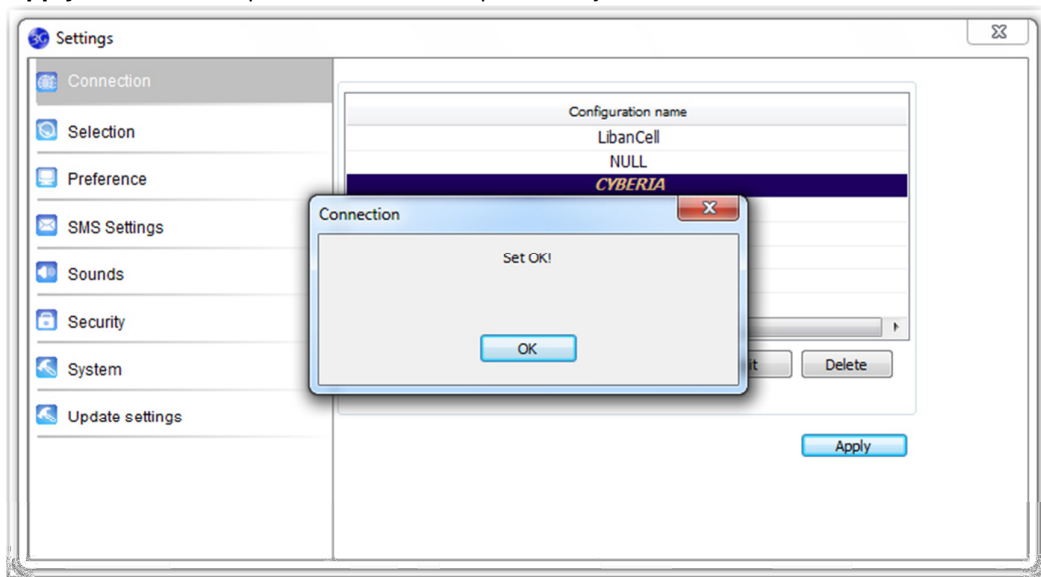


Connect to the Internet

Click on **Connect**



The Connection Manager will show the time it has been connecting for, as well as the up speed and the down speed.

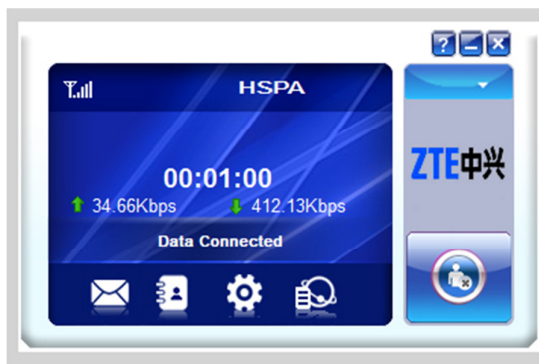

Safe removal from your system

Please close the application software, and then you can pull out the USB Modem safely.