


Belkin F5D7630

Please follow the below steps to configure Belkin F5D7630 modem

- Establish a connection between the device and the router via network cable or Wi-Fi (if there's a WIFI password you have to check bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like "Wi-Fi Password" or "WPA passcode.")
- Open a browser and type 192.168.2.1 in the address bar
- You will be prompted to enter Password and you simply need to click the submit button since no password is set by default

The screenshot displays the Belkin F5D7630 router's web interface. At the top, the Belkin logo is on the left, and the text "Wireless ADSL Modem Router Setup Utility" is in the center. On the right, there are links for "Home | Wizard | Help | Logout" and the "Internet Status: No Connection". A left-hand navigation menu lists various settings categories: LAN Setup, Internet WAN, Wireless, Firewall, and Utilities. The main content area is titled "Login" and contains the following text: "Before you can change any settings, you need to log in with a password. If you have not yet set a custom password, then leave this field blank and click 'Submit'." Below this text is a text input field labeled "Password". At the bottom of the login section, there are two buttons: "Clear Changes" and "Submit". A red arrow points upwards to the "Submit" button.

- Click Wizard link on the top menu bar then select PPPoE as connection type

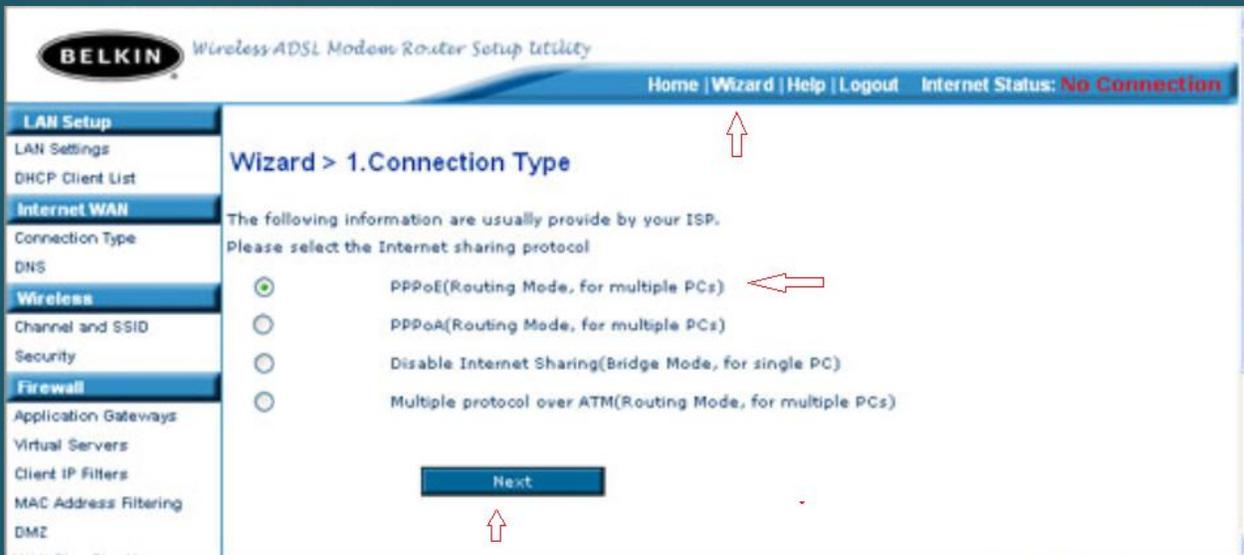

- In Parameter settings page type ADSL username and password
- Type VPI and VCI , VPI should be 0 if DSP is Ogero and 8 if DSP is GDS while VCI should be 35



- When you see configuration parameters summary click Apply to save configuration

BELKIN Wireless ADSL Modem Router Setup Utility

Home | Wizard | Help | Logout Internet Status: **No Connection**

LAN Setup

LAN Settings
DHCP Client List

Internet WAN

Connection Type
DNS

Wireless

Channel and SSID
Security

Firewall

Application Gateways
Virtual Servers
Client IP Filters
MAC Address Filtering
DMZ

Wizard > You have filled in the following Configuration Parameters

ADSL Parameters:

Protocol	PPP over ATM
VPI / VCI	0 / 38
AALS Encapsulation	VC MUX
IP Address	0.0.0.0
Subnet Mask	0.0.0.0
Domain Name Server	

ISP Parameters:

User Name	
Password	

Back Apply



- Under Wireless , click on Channel and SSID
- In SSID textbox type Wireless Name and click Apply Changes
- You may need to connect your device to new Wi-Fi name using old password

BELKIN Wireless ADSL Modem Router Setup Utility

Home | Wizard | Help | Logout Internet Status: **Connected**

LAN Setup

LAN Settings
DHCP Client List

Internet WAN

Connection Type
DNS

Wireless

Channel and SSID

Security

Firewall

Application Gateways
Virtual Servers
Client IP Filters
MAC Address Filtering
DMZ
WAN Ping Blocking
Security Log

Utilities

Restart Router
Restore Factory Default
Save/Backup Settings

Wireless > Channel and SSID

To make changes to the wireless settings of the router, make the changes here. Click "Apply Changes" to save the settings. [More Info](#)

Wireless Channel > 11

SSID > belkin54g

ESSID Broadcast > ENABLE DISABLE

Wireless Mode > Long Range Mixed (11b+11g)

Transmission Rate > Fully Automatic

g Nitro > ENABLE DISABLE

Clear Changes Apply Changes






- Go to wireless security and select WPA-PSK(no server)as WPA mode
- Make sure Encryption is TKIP or AES then type wireless password in Pre-shared Key(PSK) and click Apply Changes (safest passwords are long and contain at least 8 digits of mixed letters, number)

The screenshot displays the 'Wireless > Security > WPA' configuration page in the Belkin router's web interface. The left-hand navigation menu is visible, with 'Security' highlighted under the 'Wireless' section. The main content area shows the following settings:

- WPA >** WPA-PSK (no server) (indicated by a red arrow pointing left)
- Encryption technique** TKIP
- Pre-shared Key (PSK)** [Redacted with asterisks] (indicated by a red arrow pointing right)

Below the settings, there is a checkbox for 'obscure PSK' which is checked. A descriptive text block explains: 'Wireless Protected Access with a Pre-Shared Key: The key is a password, in the form of a word, phrase or series of letters and numbers. The key must be between 8 and 63 characters long and can include spaces and symbols. Each client that connects to the network must use the same key (Pre-Shared Key).' At the bottom of the page, there are two buttons: 'Clear Changes' and 'Apply Changes' (indicated by a red arrow pointing up).