



Linksys XAC-series


- Establish a connection between the device and the router via network cable or Wi-Fi (if there's a WIFI password you have to check bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like "Wi-Fi Password" or "WPA passcode.")
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar

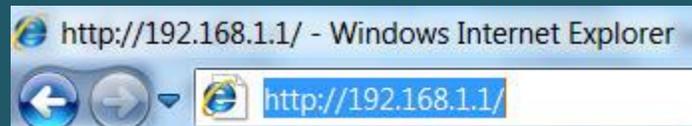


- Enter admin password then click Sign in

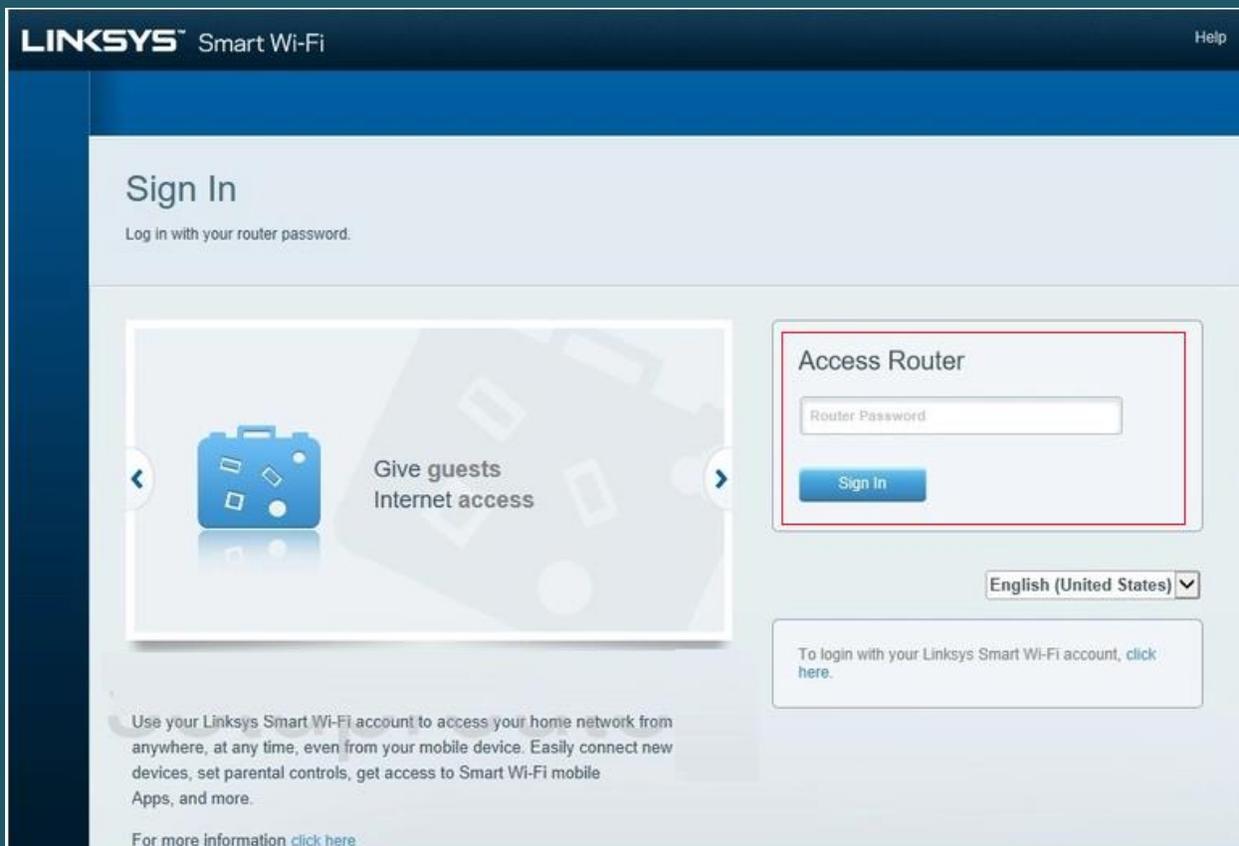

- On the left navigation pane, click connectivity then internet settings tab

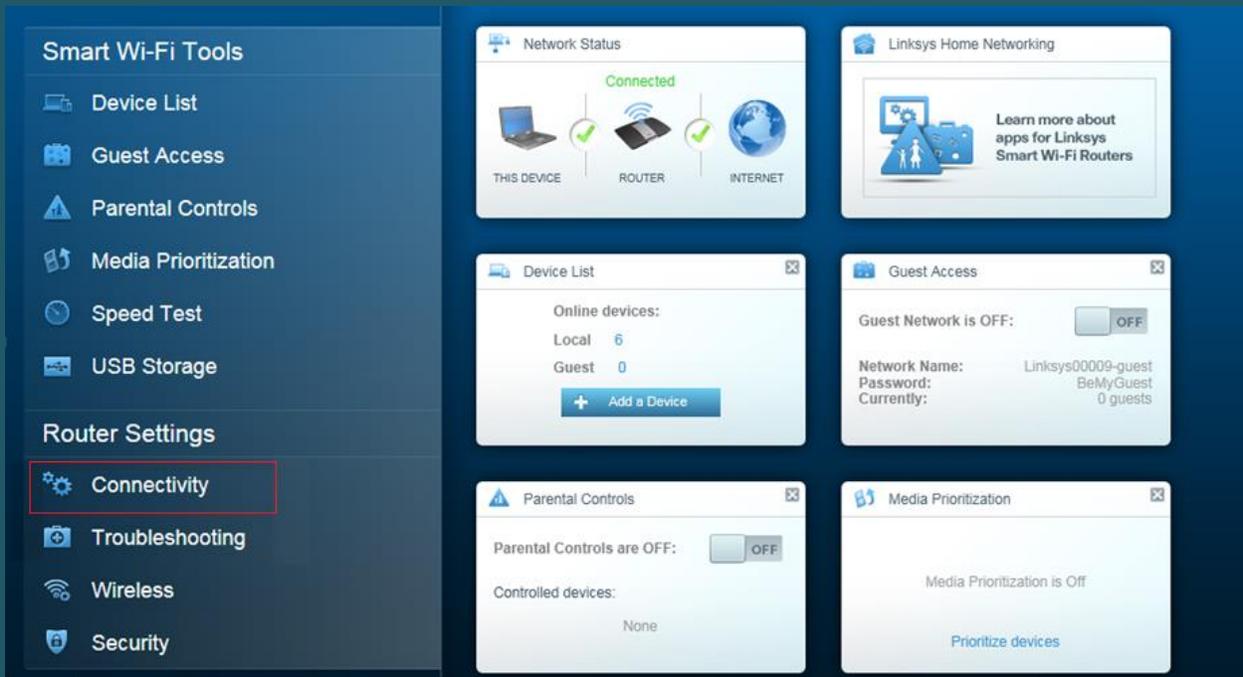

- In internet settings tab , click IPV4 sub-tab then edit

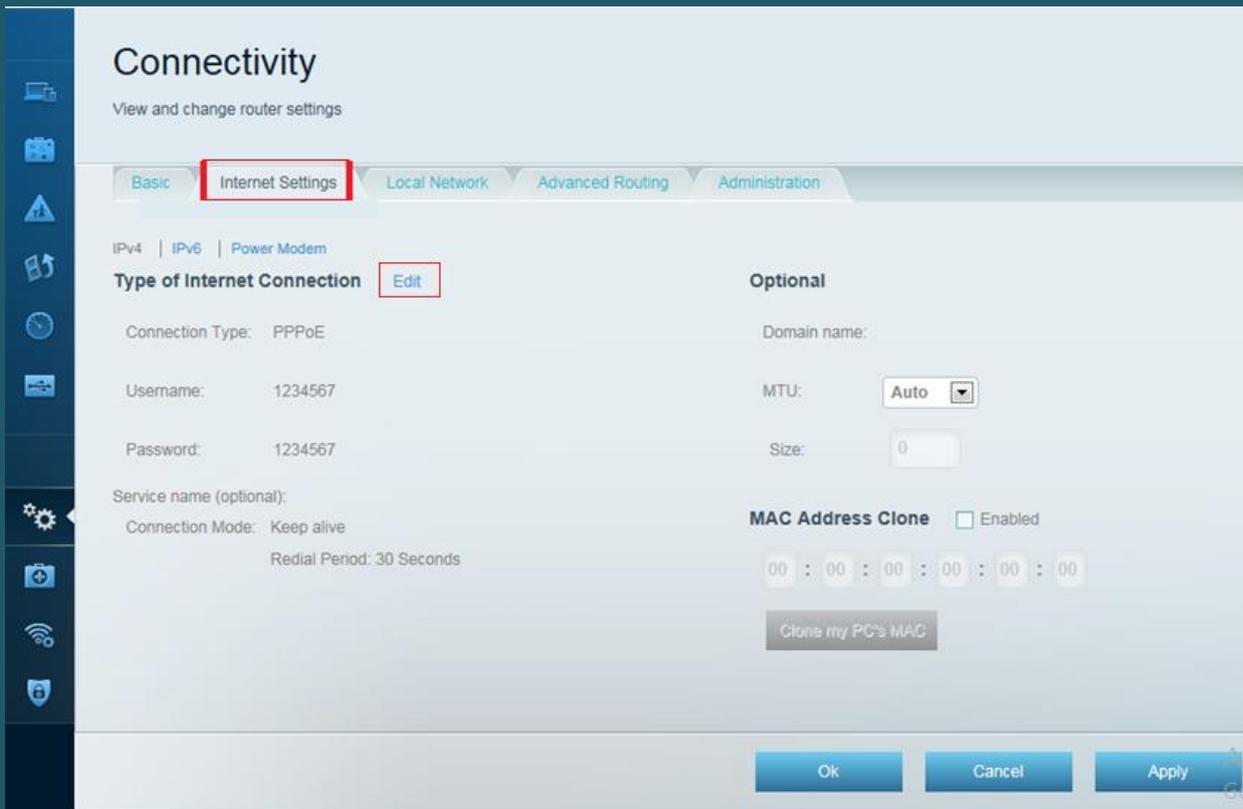

- Select PPPoE as connection type and type ADSL username and password then click power modem sub-tab

Connectivity
View and change router settings

Basic | Internet Settings | Local Network | Advanced Routing | Administration

IPv4 | IPv6 | Power Modem

Type of Internet Connection | Edit

Connection Type:

Username:

Password:

Service name (optional):

Connection Mode: Connect on demand
Max Idle Time: Minutes

Keep alive
Redial Period: Seconds

Optional

Domain name:


MTU:

Size:


MAC Address Clone Enabled

: : : : :

- In power mode sub-tab , choose LLC as Multiplexing and select Multimode option as modulation
- VPI value should be 0 if DSP is Ogero and 8 if DSP is GDS and make sure VCI is 35
- When changes are done click Apply then OK

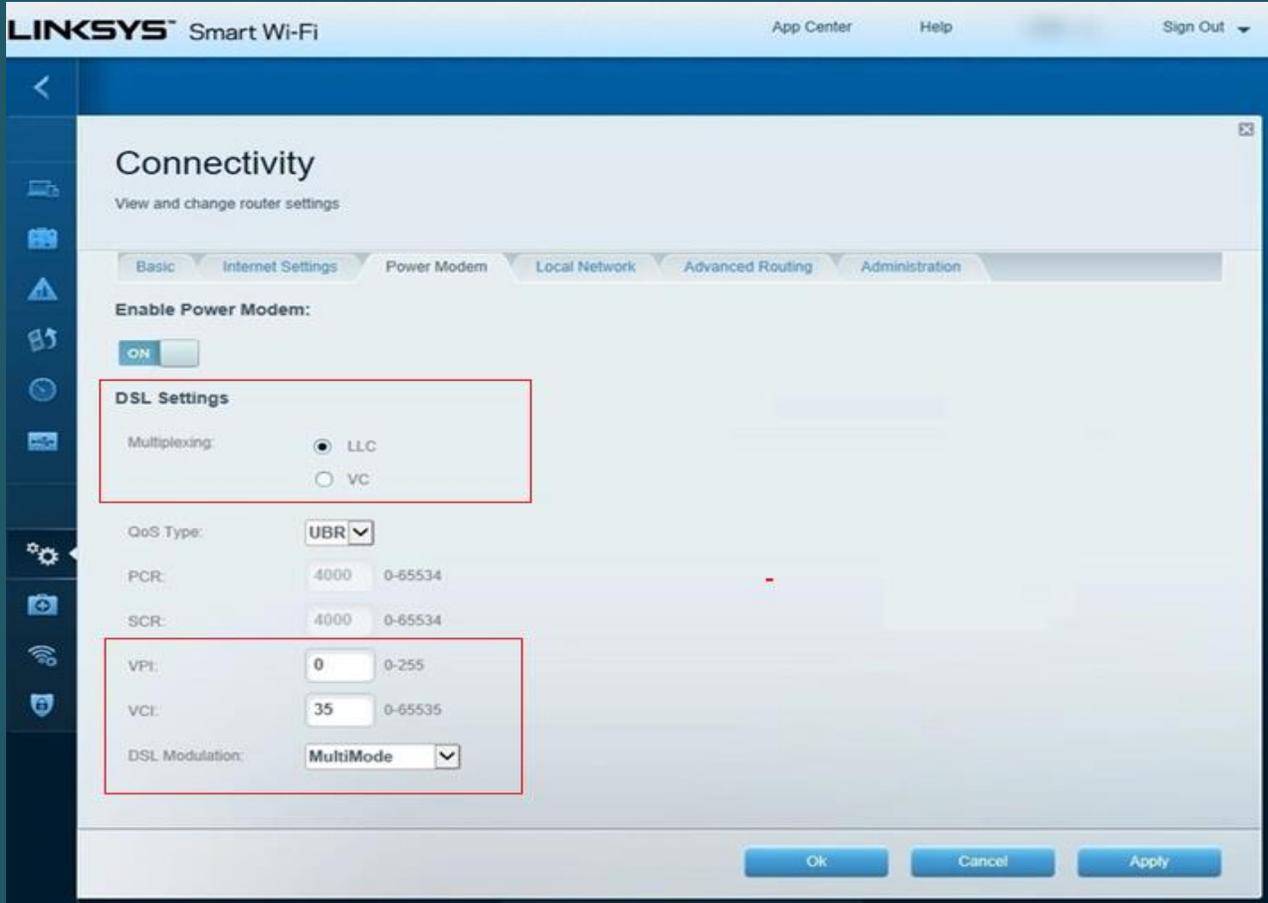

- On the left navigation pane, look under Router Settings, and select Wi-Fi Settings.

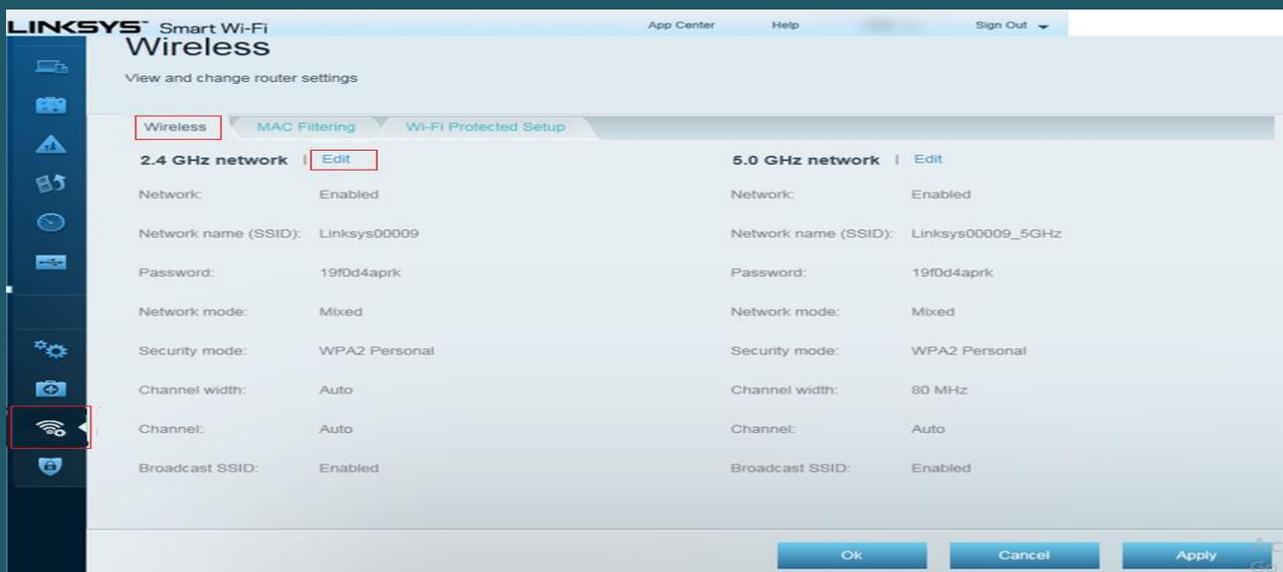

- Click Edit then type in Network Name (SSID) the desired name of Wi-Fi and in password textbox the password
- Make sure security mode is WPA2 Personal then click Apply and OK to save changes

Wireless

View and change router settings

Wireless | MAC Filtering | W-Fi Protected Setup

2.4 GHz network | Edit

Network: Enabled

Network name (SSID):

Password:

Network mode:

Security mode:

Channel width:

Channel:

Broadcast SSID: Enabled

5.0 GHz network | Edit

Network: Enabled

Network name (SSID): Linksys00009_5GHz

Password: 19f0d4aprk

Network mode: Mixed

Security mode: WPA2 Personal

Channel width: 80 MHz

Channel: Auto

Broadcast SSID: Enabled