


TP-Link TD-W8901N

- Establish a connection between the device and the router via network cable or Wi-Fi , If Wi-Fi is protected by a password look at sticker on bottom side
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar



- You should now see the router login page with 2 text fields where you can type a username and a password
- The default username is **admin** and default password is **admin**

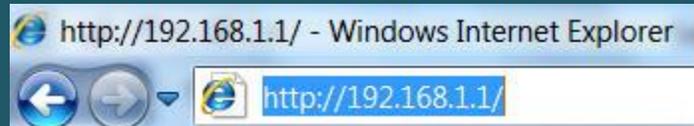

- After typing username and password , click "Login" and now you should see modem's control panel
- Select the Quick Start tab, then click RUN WIZARD,

Quick Start

This ADSL Router is ideal for home networking and small business networking. The 'Quick Start' wizard will guide you to configure the ADSL router to connect to your ISP (Internet Service Provider).

RUN WIZARD

- When Quick Start page opens. Click NEXT button to set your Time Zone

Quick Start

The Wizard will guide you through these four quick steps. Begin by clicking on **NEXT**.

Step 1. Set your new password

Step 2. Choose your time zone


Step 3. Set your Internet connection

Step 4. Re-start your ADSL router

NEXT


EXIT

- In the Time Zone page, select your country if available and click Next again

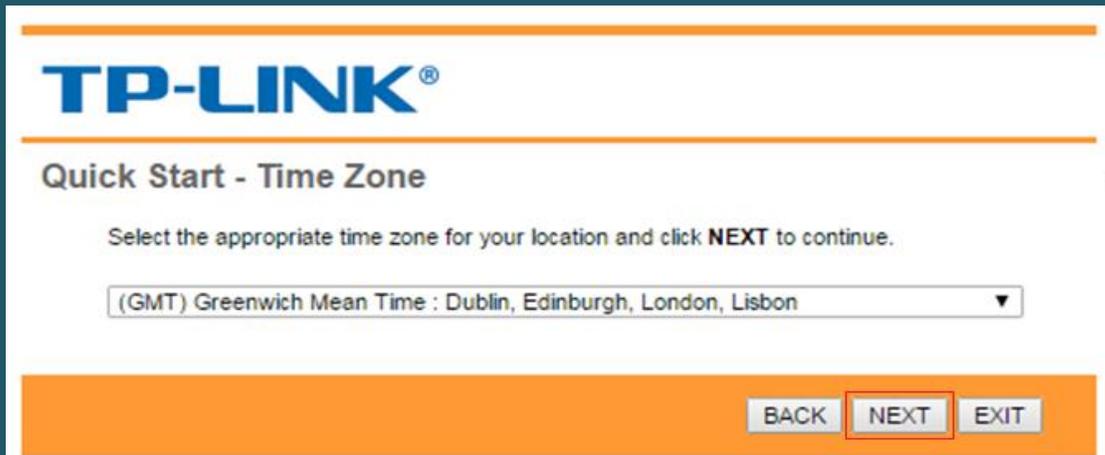

The screenshot shows the TP-LINK Quick Start - Time Zone configuration page. At the top is the TP-LINK logo. Below it is the title "Quick Start - Time Zone". A instruction reads: "Select the appropriate time zone for your location and click NEXT to continue." There is a dropdown menu currently showing "(GMT) Greenwich Mean Time : Dublin, Edinburgh, London, Lisbon". At the bottom right, there are three buttons: "BACK", "NEXT" (which is highlighted with a red box), and "EXIT".

- Make sure Country and ISP are Others and ISP Connection Type PPPoE/PPPoA
- Type ADSL username and password then set the compatible VPI/VCI
- VPI should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35
- Select PPPoE LLC as Connection Type then click Next

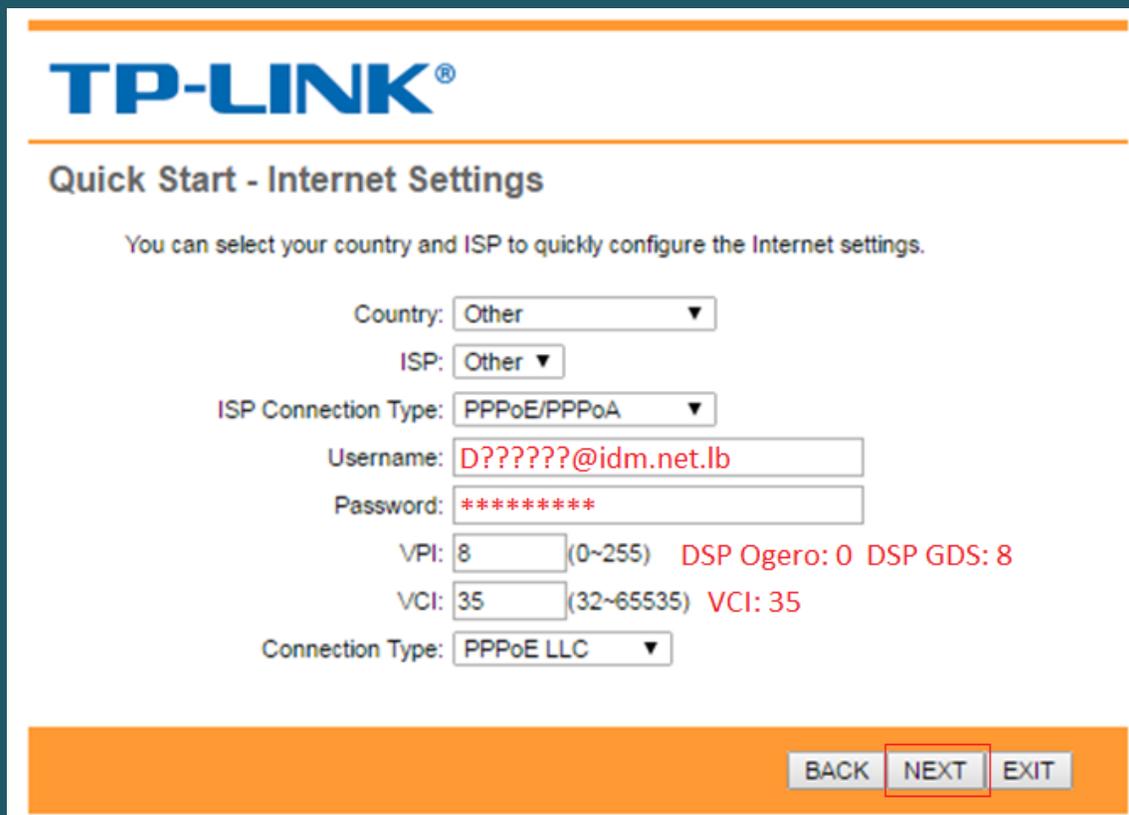

The screenshot shows the TP-LINK Quick Start - Internet Settings configuration page. At the top is the TP-LINK logo. Below it is the title "Quick Start - Internet Settings". A instruction reads: "You can select your country and ISP to quickly configure the Internet settings." The form contains the following fields:

- Country: Other (dropdown)
- ISP: Other (dropdown)
- ISP Connection Type: PPPoE/PPPoA (dropdown)
- Username: D??????@idm.net.lb
- Password: *****
- VPI: 8 (0~255) DSP Ogero: 0 DSP GDS: 8
- VCI: 35 (32~65535) VCI: 35
- Connection Type: PPPoE LLC (dropdown)

At the bottom right, there are three buttons: "BACK", "NEXT" (which is highlighted with a red box), and "EXIT".

In the SSID textbox type Wi-Fi Name , and make sure Authentication type is WPA2-PSK

- In Pre-Shared key textbox enter Wi-Fi password (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)



TP-LINK®

Quick Start - Wlan

You may enable/disable Wlan, change the Wlan SSID and Authentication type in this page. Click **NEXT** to continue.

Access Point : Activated Deactivated

SSID :


Broadcast SSID : Yes No

Authentication Type :

Encryption :

Pre-Shared Key : (8~63 ASCII characters or 64 hexadecimal characters)

- Once done click Next and Save

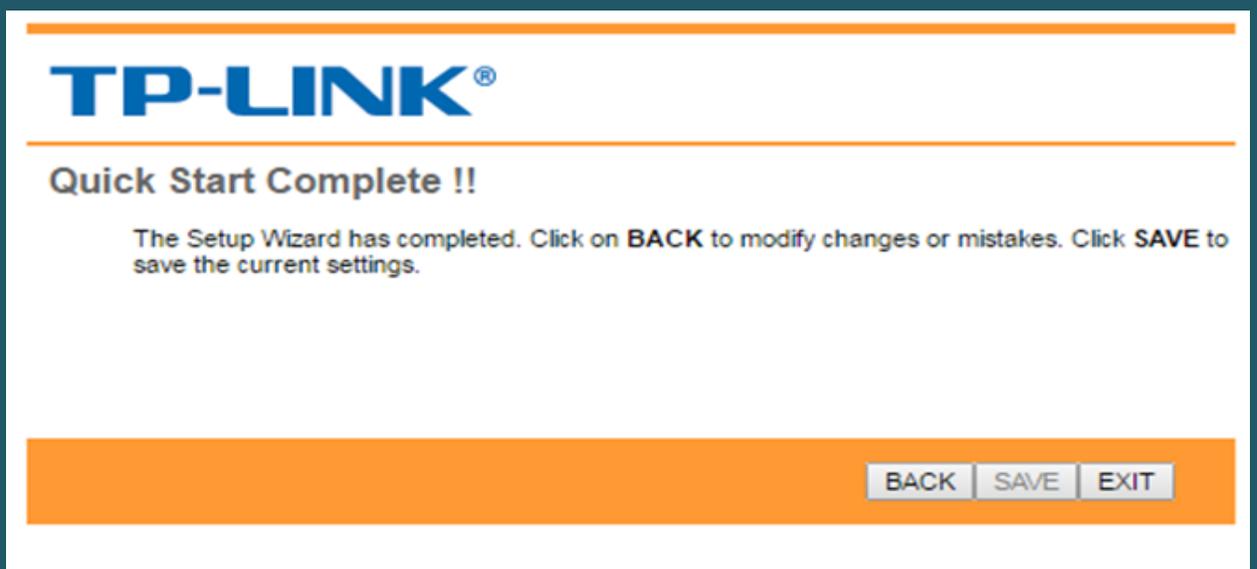

TP-LINK®

Quick Start Complete !!

The Setup Wizard has completed. Click on **BACK** to modify changes or mistakes. Click **SAVE** to save the current settings.