

## Technicolor DWA0100

Please follow the below steps to configure Technicolor DWA0100 ADSL/VDSL Modem.

- Establish a connection between the device and the router via network cable or Wi-Fi (default WIFI password is simply written on the bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like “Wi-Fi Password” or “WPA passcode.”)
- Open any browser and type in the address bar 192.168.1.1
- You will be prompted to enter Username and password , Username is Administrator and Password should be printed on the label on the backside of modem



- After logging in, click on Wizard, then on the Wizard Setup Sub-Directory.

technicolor *technicolor VDSL Router* English Logout

Site contents:

- WIZARD
  - Wizard Setup
- SETUP
- ADVANCED
- SHARE
- MAINTENANCE
- STATUS

**System**

Firmware Version: 100XLE 0b1  
 Modem Type: DWA0100  
 Modem Vendor: Technicolor  
 Modem Serial Number: CP2112AZ001138  
 Uptime: 15 min  
 Current Time: 2017/Jan/01 00:15:27

**DSL Link Status**

Modulation Type: N/A  
 Current Rate(kbps): DS: 0 US: 0  
 Max Rate(kbps): DS: 0 US: 0

**WAN Configuration**

WAN Mode: xDSL

Interface	WAN Type	VID/PRI	VPI/VCI	Encapsulation	Protocol	IP Address	Gateway	Status
ppp0	VDSL	N/A	N/A	N/A	PPPoE			Down

- Select routed- PPPoE as connection type
- Under PPP connection details section , type ADSL username and password then click Apply

**Connection Type**

Type  Bridged  Routed-PPPoE  Routed-PPPoE+IPTV  Routed-ADSL+WAN  Routed-VDSL+WAN

**PPP Connection Details**

Status Connecting

Enabled

NAT

Username

Password

IP address


IPv6 address

Gateway


DNS servers

Apply


- To configure wireless settings , On the left navigation pane expand Setup directory and click Wireless settings
- Click Basic Settings to modify SSID , WiFi Channel and the visibility of Wi-Fi

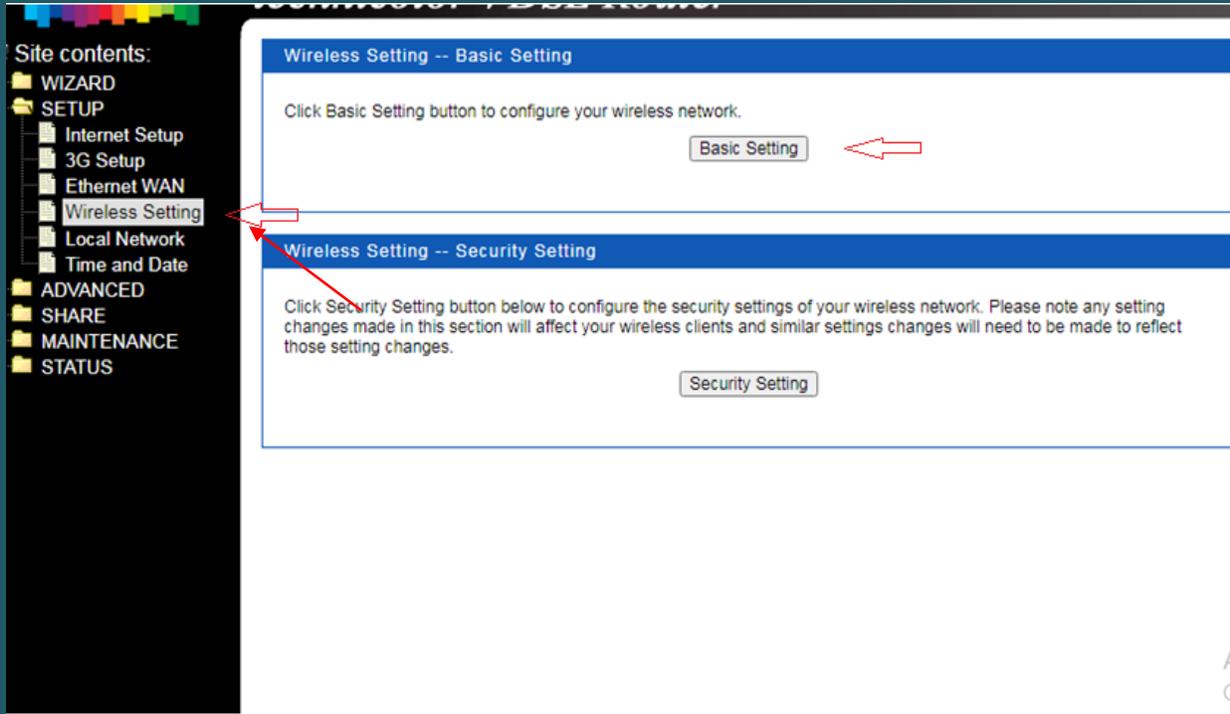

- In SSID textbox type wireless name then click Apply
- After clicking apply you may need to connect your device again to new wifi Name

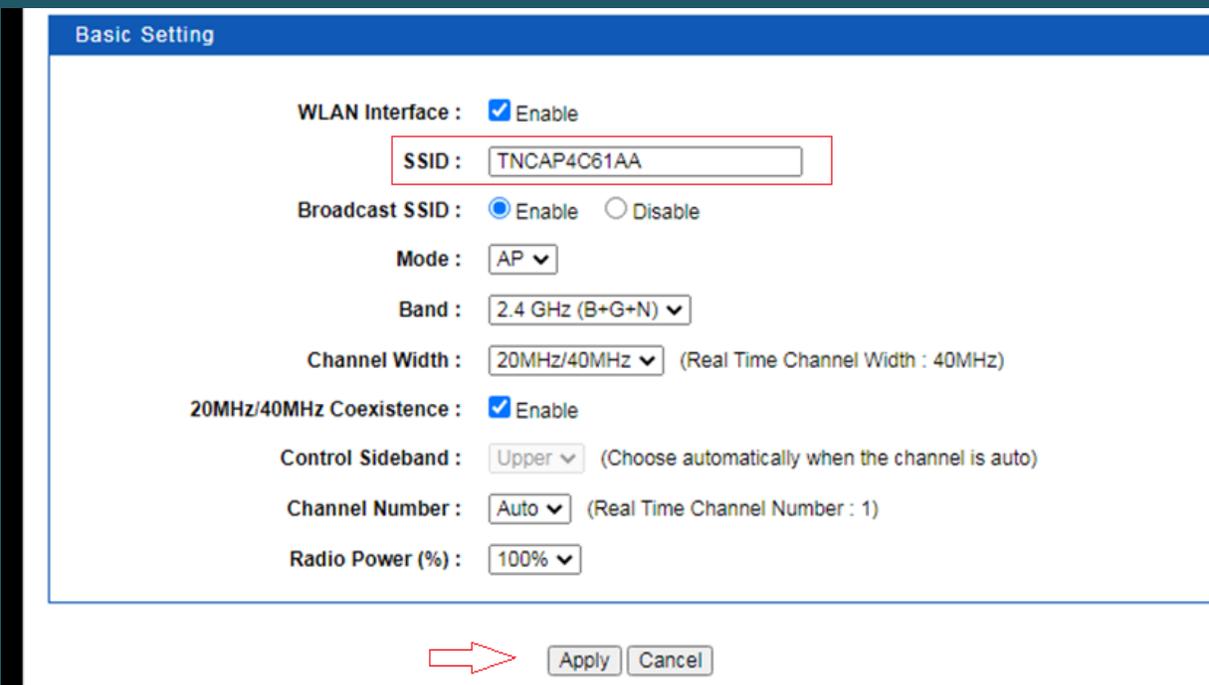

- Click Security setting to secure your modem

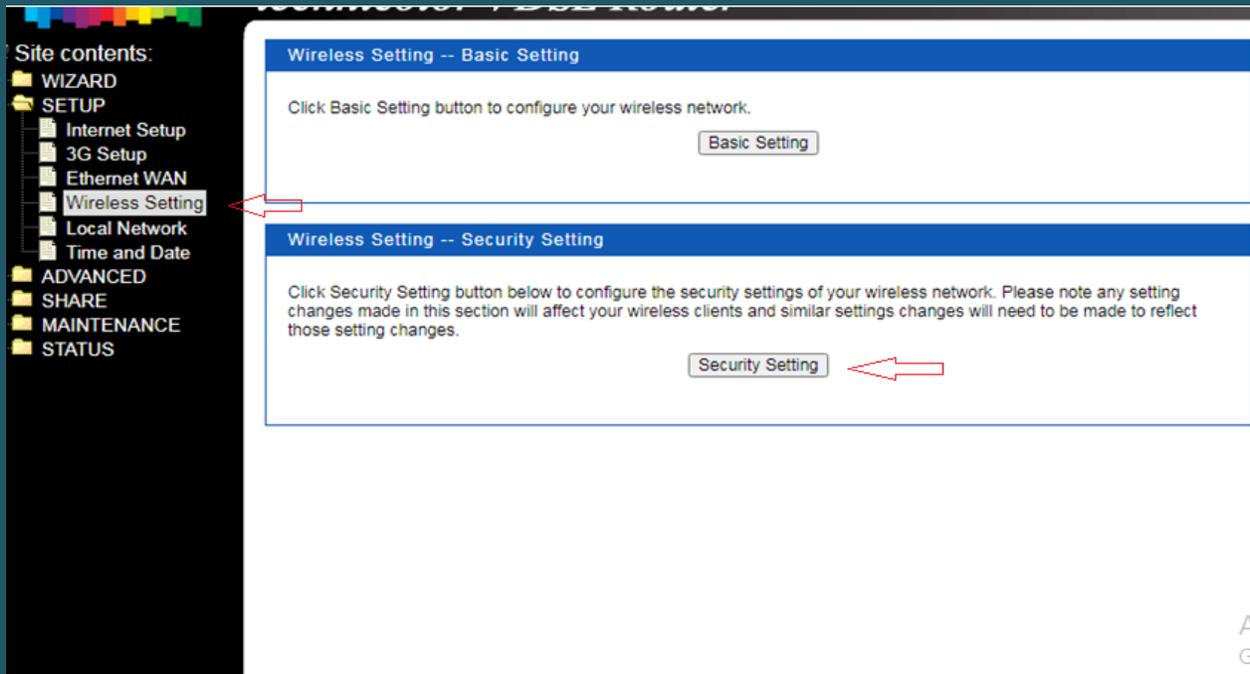

- Choose correct SSID then make sure Encryption is WPA/WPA2 and Authentication is Personal (Pre-Shared Key)
- In the Pre-Shared Key textbox type wireless password (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)
- Once changes are done, click Apply to save configuration.

