



Technicolor TG582n

- Establish a connection between the device and the router via network cable or Wi-Fi
- Open your web browser and type the default IP Address 192.168.1.254 in the address bar

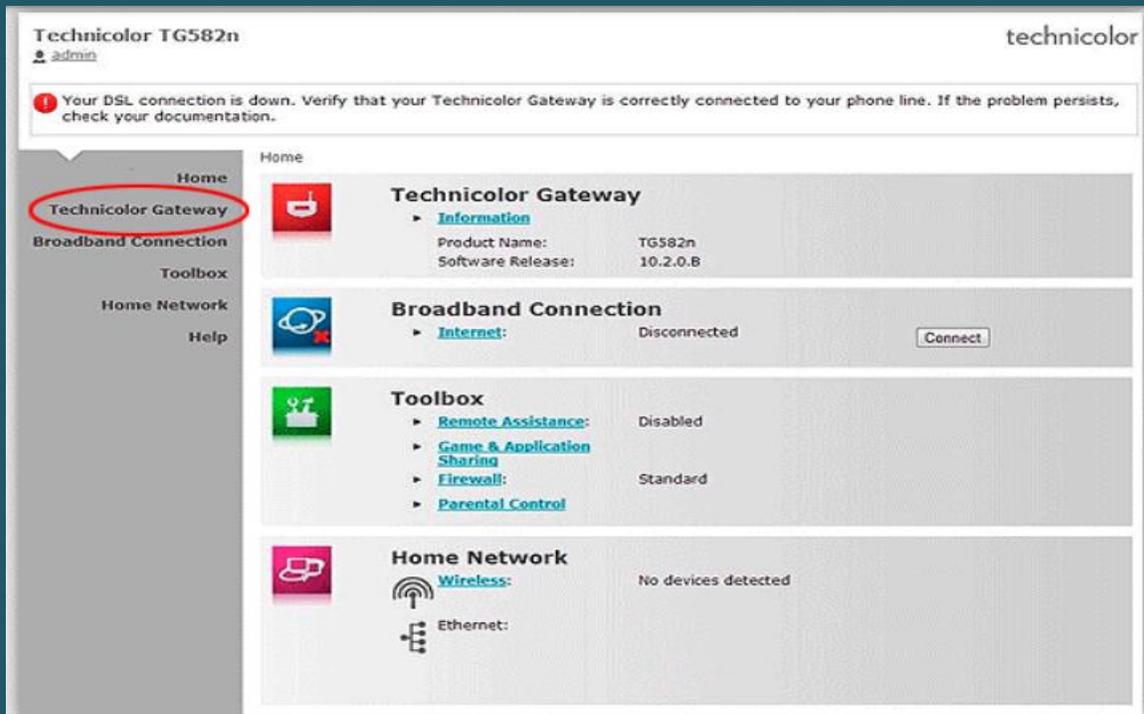


- Click Technicolor Gateway on the left side menu then Setup my Technicolor Gateway

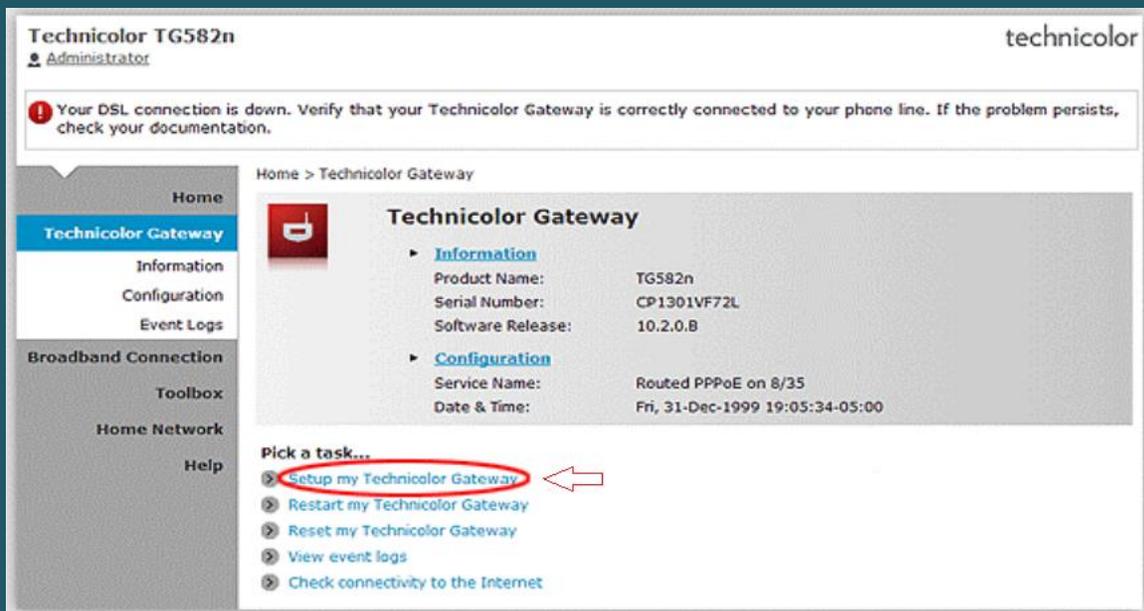

- When you see wizard welcome page click Next



- Select Routed PPP Service then click Next

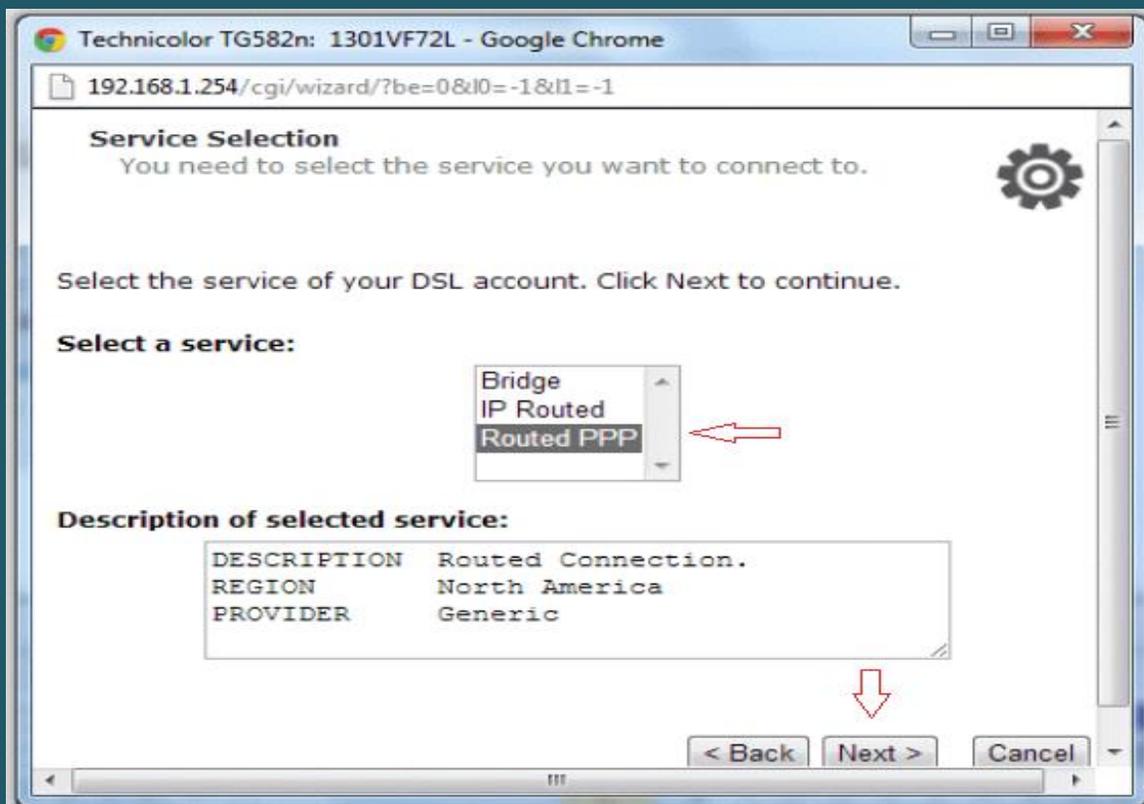

- Select VPI and VCI , Value should be 0.35 if DSP is Ogero and 8.35 if DSP is GDS
- Choose PPP Over Ethernet (PPPoE) as Connection Type then click Next

Technicolor TG582n: 1301VF72L - Google Chrome

192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

Routed Internet Connection

Specify the details of the Internet connection. All information should be provided by your ISP.

VPI/VCI: 0.35

Choose a VPI/VCI from the list

Connection Type: PPP over ATM (PPPoA) PPP over Ethernet (PPPoE)

IPv6: Enable IPv6 on this interface

< Back Next > Cancel

- Type ADSL Username and Password then confirm Password and click Next

Technicolor TG582n: 1301VF72L - Google Chrome

192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

Internet Account Settings

Specify the details of your Internet Account. All information should be provided by your ISP.

User Name: D?????@idm.net.lb

Enter your Internet connection user name.

Password: *****

Enter your Internet connection password.

Confirm Password: *****

Re-enter your password.

ADSL Username and Password Have been sent to you by SMS

< Back Next > Cancel

- Keep Administrator access user without password and click Next

192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

Access Control

Specify user name and password to prevent unwanted access to the Technicolor Gateway management interface.

User Name
Enter a user name.

Password
Enter a password.

Confirm Password
Re-enter the password.



- Review configuration summary then click Start

Start configuration ?

Review settings before configuring the Technicolor Gateway.


The Wizard has enough information to configure your device. If you want to review or change settings, click Back. Click Start to start configuration.

Settings:

Device:	
Name	IG582n
Serial #	1301VF72L
Device Configuration:	
Region	North America
Provider	Generic
Service	Routed PPP
Description	Routed Connection.




- Wait until configuring modem

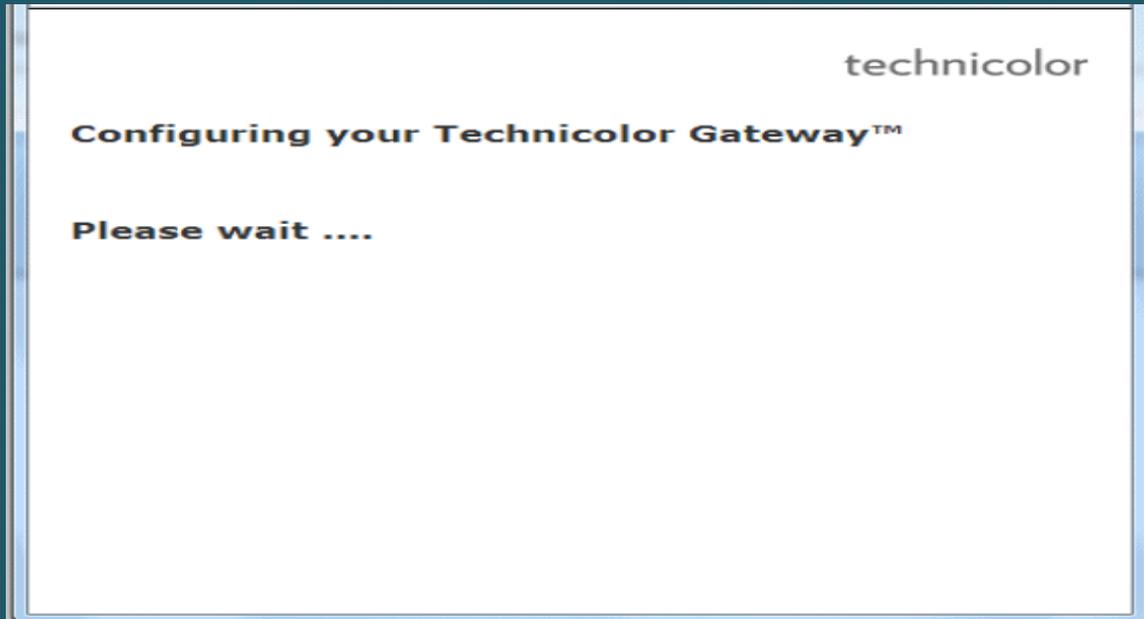


- Once configuration is completed , Click Finish to close configuration wizard



- Click Home Network on Left Menu. Then, Click Wireless Name (WLAN) on the right hand side

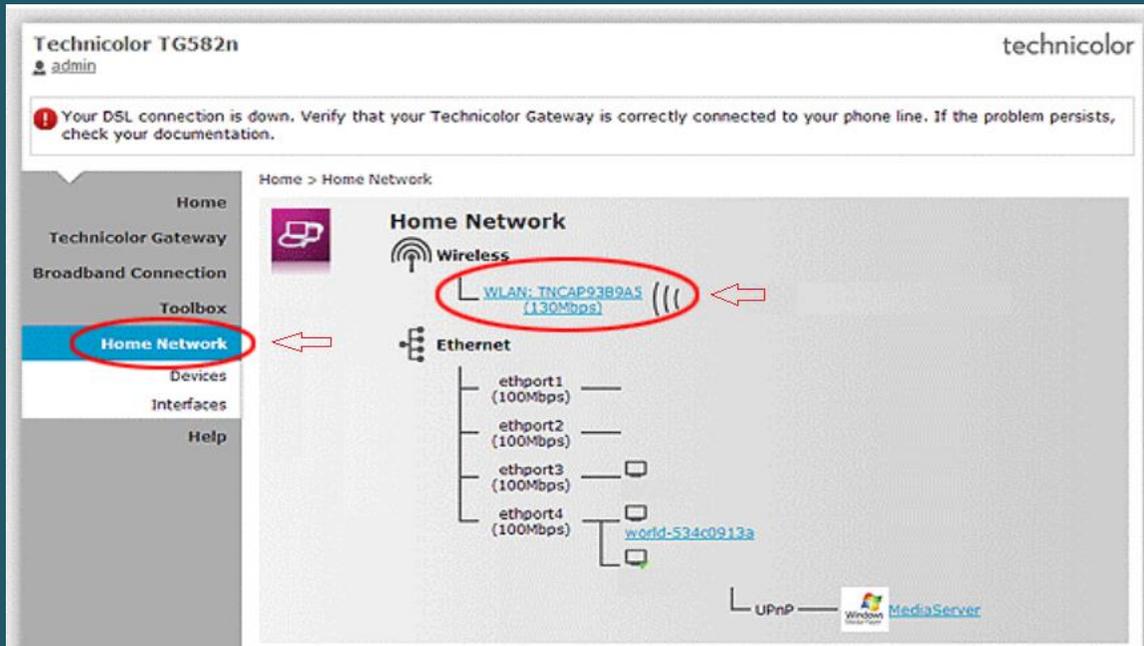

- In Wireless Access Point page click configure on the top right corner

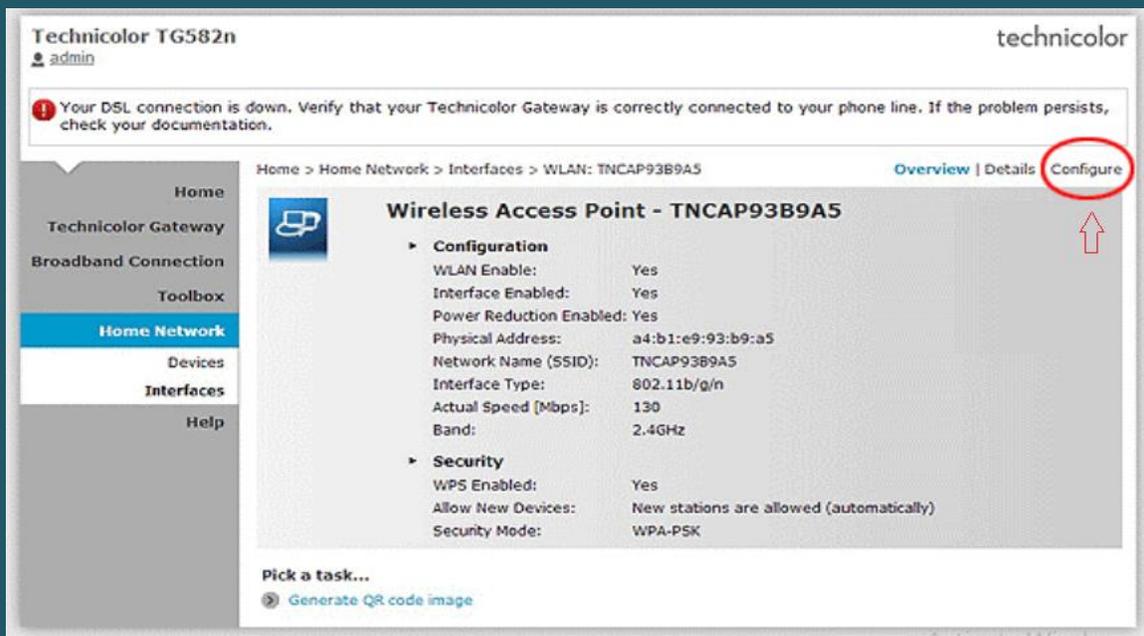

- Make sure Interface is enabled then type Wi-Fi name in Network Name (SSID)
- Scroll down to Security and choose WPA2-PSK as Security Mode
- Type wireless Password in WPA-PSK Encryption Key then click Apply to save configuration
(safest passwords are long and contain at least 8 digits of mixed letters, numbers, and symbols)

Technicolor TG582n
admin

technicolor

! Your DSL connection is down. Verify that your Technicolor Gateway is correctly connected to your phone line. If the problem persists, check your documentation.

Home > Home Network > Interfaces > WLAN: TNCAP93B9A5 Overview | Details | Configure

Wireless Access Point - TNCAP93B9A5

Configuration

- WLAN Enable:
- Interface Enabled:
- Power Reduction Enabled:
- Physical Address: a4:b1:e9:93:b9:a5
- Network Name (SSID): TNCAP93B9A5
- Actual Speed [Mbps]: 130
- Band: 2.4GHz
- Channel Selection: Automatic
- Region: USA
- Channel: 6
- Allow multicast from Broadband Network:

Security

- WPS Enabled:
- Broadcast Network Name:
- Allow New Devices: New stations are allowed (automatically)
- Security Mode: WPA2-PSK
- WPA-PSK Encryption Key: *****

Apply Cancel

Pick a task...
Generate QR code image