



# Technicolor TG582n SoftV8

- Establish a connection between the device and the router via network cable or Wi-Fi
- Open your web browser and type the default IP Address 192.168.1.254 in the address bar

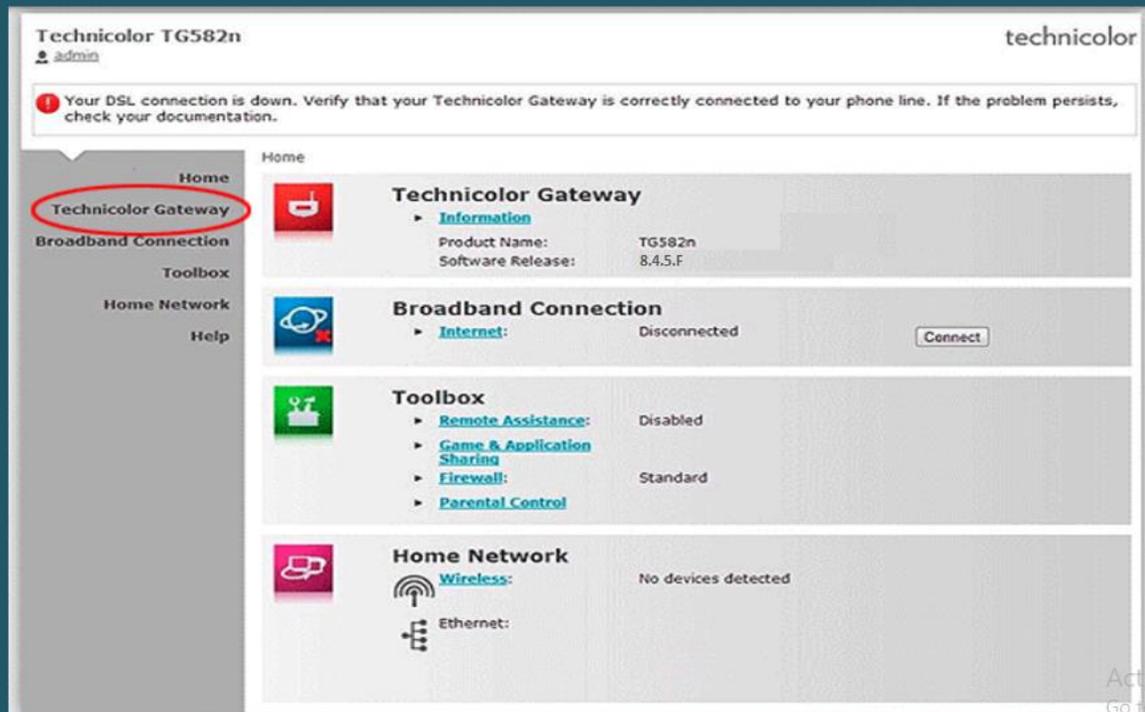


- Click Technicolor Gateway on the left side menu then Setup my Technicolor Gateway

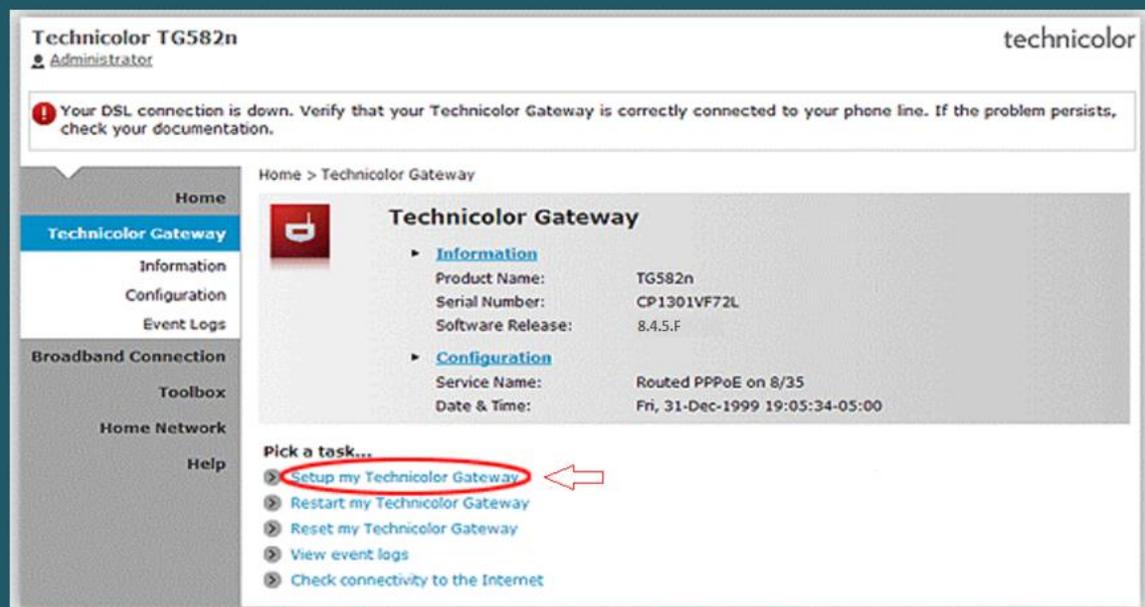

- When you see wizard welcome page click Next



- Select Routed PPP Service then click Next

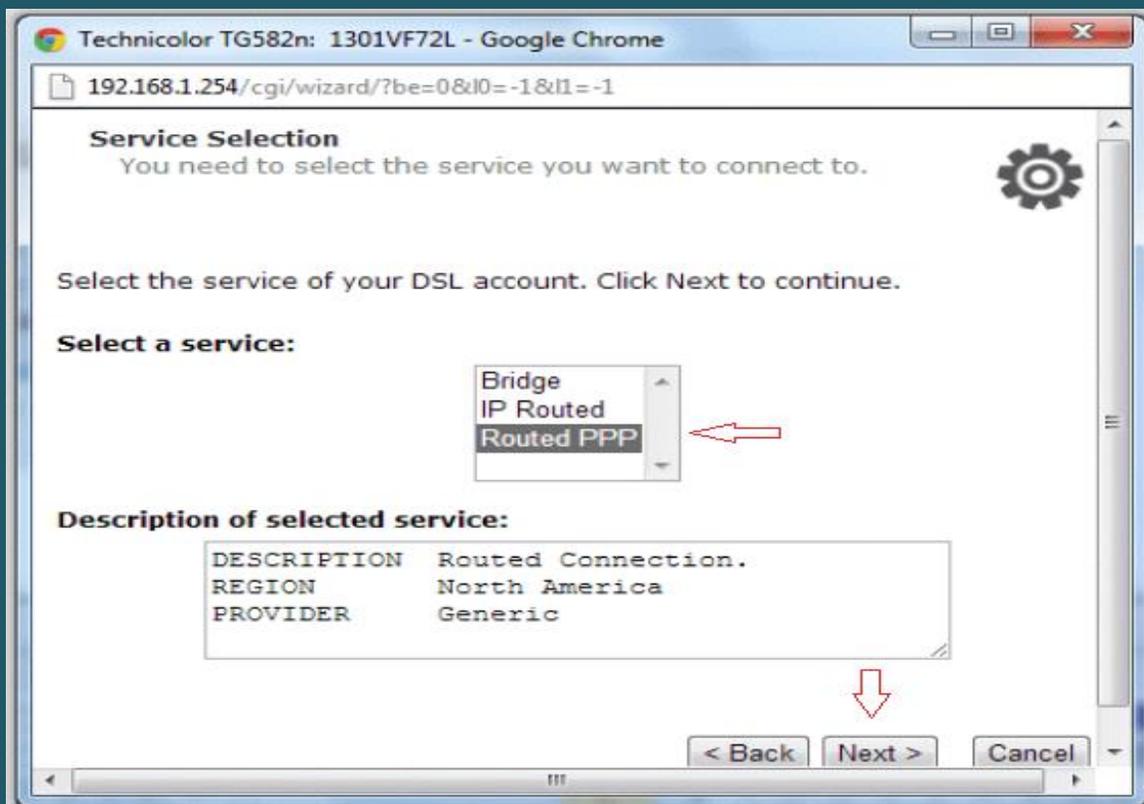

- In SSID Textbox type Wi-Fi name
- In key type Wi-Fi password then confirm password and click Next

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Wireless Settings

Specify the details of your wireless connection.

SSID

Enter your wireless network name.

key

Enter your security key.

Confirm key

Re-enter your security key.

- Type ADSL Username and Password then confirm Password and click Next

192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Internet Account Settings

Specify the details of your Internet Account. All info should be provided by your ISP.

User Name

Enter your Internet connection user name.

Password

Enter your Internet connection password.

Confirm Password

Re-enter your password.

ADSL Username and Password Have been sent to you by SMS

- Keep Administrator access user without password and click Next

192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Access Control

Specify user name and password to prevent unwanted access to the Technicolor Gateway management interface.

User Name   
Enter a user name.

Password   
Enter a password.

Confirm Password   
Re-enter the password.



- Review configuration summary then click Start

### Start configuration ?

Review settings before configuring the Technicolor Gateway.


The Wizard has enough information to configure your device. If you want to review or change settings, click Back. Click Start to start configuration.

Settings:

Device:	
Name	IG582n
Serial #	1301VF72L
Device Configuration:	
Region	North America
Provider	Generic
Service	Routed PPP
Description	Routed Connection.



- Wait until configuring modem

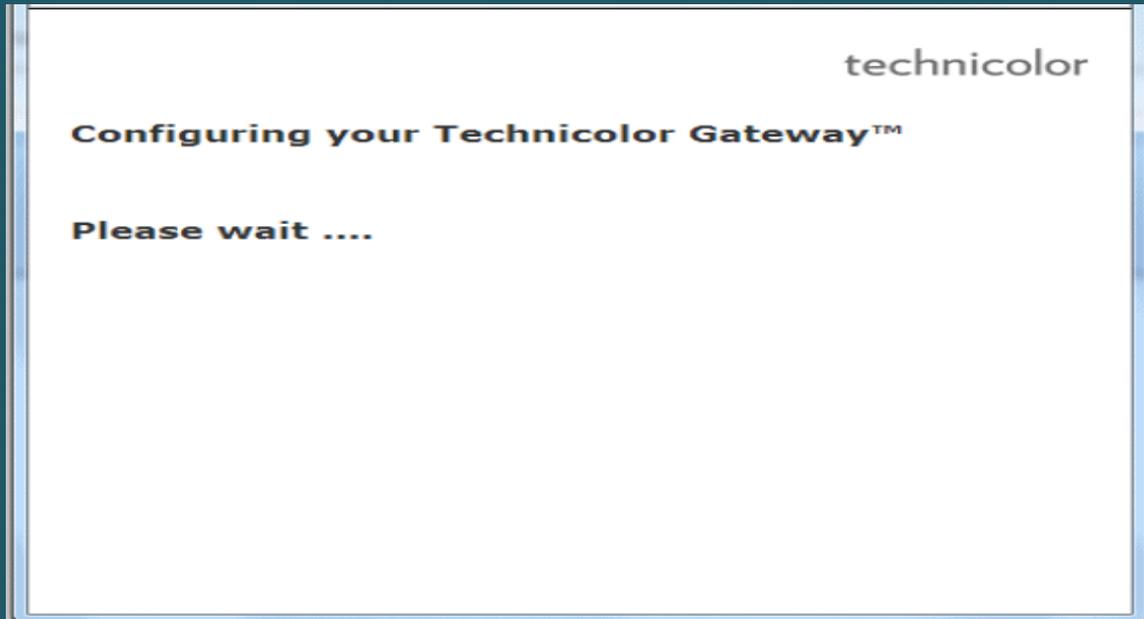

- Once configuration is completed , Click Finish to close configuration wizard

