


## Netis DL43 Series

- Establish a connection between the device and the router via network cable or Wi-Fi (if there's a WIFI password you have to check bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like "Wi-Fi Password" or "WPA passcode.")
- Open your web browser and enter **http://192.168.1.1** in the browser address bar
- Type Username: guest and password: guest to login to modem's interface

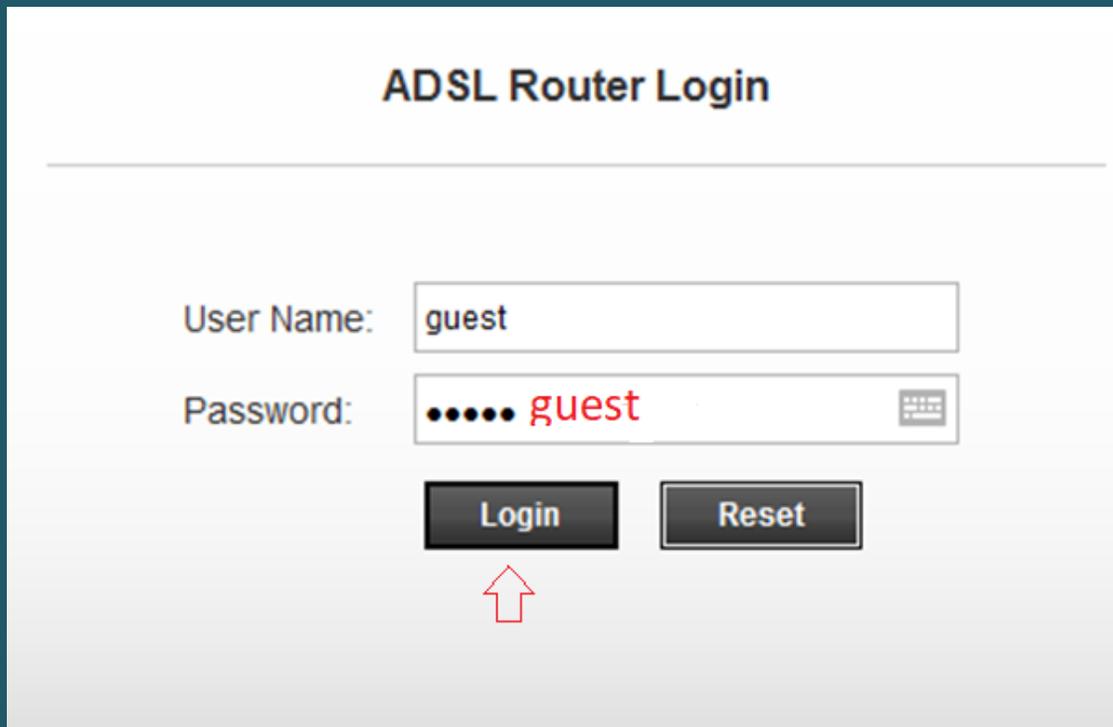


ADSL Router Login

User Name:

Password:

↑

- Click START to run Quick Start guide

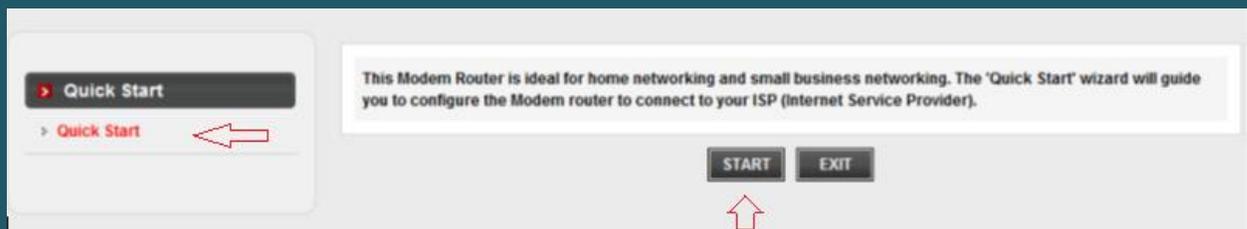


Quick Start

> Quick Start ←


This Modem Router is ideal for home networking and small business networking. The "Quick Start" wizard will guide you to configure the Modem router to connect to your ISP (Internet Service Provider).

↑


- The Wizard will guide you through these four quick steps. Begin by clicking on NEXT

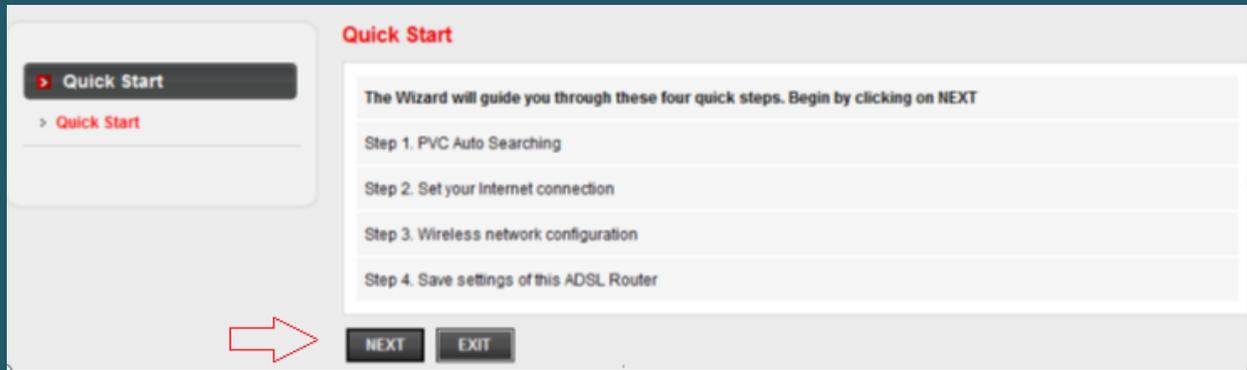

- Click cancel to input VPI and VCI Manually

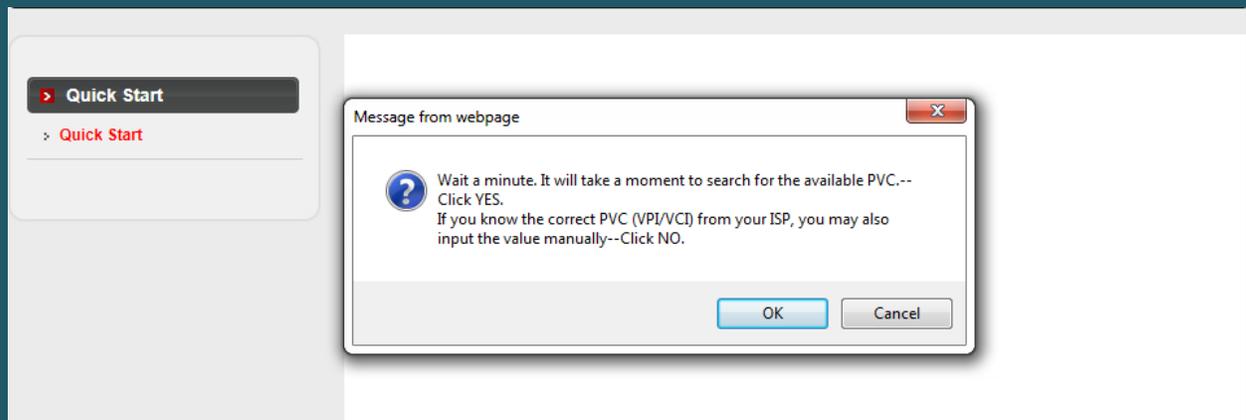

- Keep Auto PVC disabled then enter VPI and VCI , VPI should be 0 if DSP is Ogero and 8 if DSP is GDS while VCI should be 35 then click Next

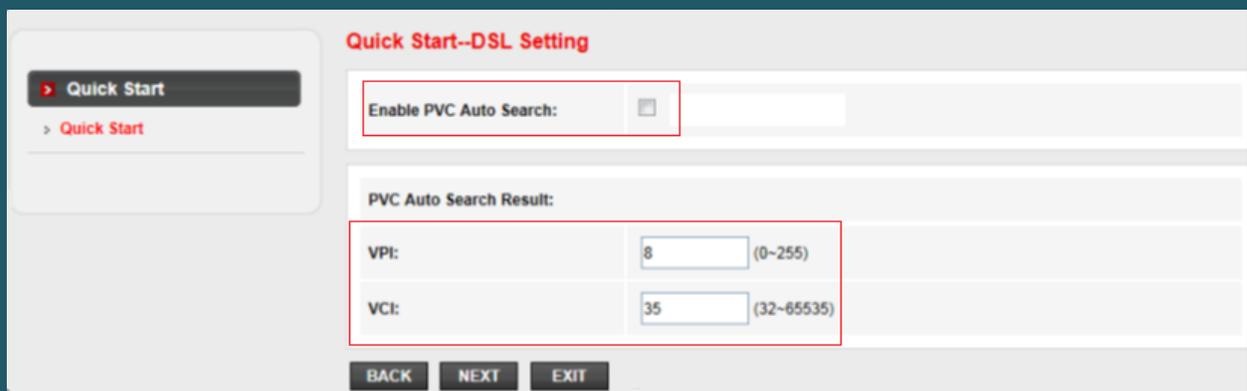

- Choose PPPoE as ISP connection type then click Next

**Quick Start---ISP Connection Type**

Select the Internet connection type to connect to your ISP. Click NEXT to continue

<input type="radio"/> Dynamic IP Address	Choose this option to obtain a IP address automatically from your ISP.
<input type="radio"/> Static IP Address	Choose this option to set static IP information provided to you by your ISP.
<input checked="" type="radio"/> PPPoE/PPPoA	Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users)
<input type="radio"/> Bridge Mode	Choose this option if your ISP uses Bridge Mode.

BACK NEXT EXIT

- Type ADSL username and password and make sure connection type is PPPoE LLC then click Next

**Quick Start---PPPoE/PPPoA**

Enter the PPPoE/PPPoA information provided to you by your ISP. Click NEXT to continue

Username: D?????@idm.net.lb

Password: \*\*\*\*\*

Connection Type : PPPoE LLC

- PPPoE LLC
- PPPoE VC-Mux
- PPPoA LLC
- PPPoA VC-Mux

BACK NEXT EXIT

- In SSID textbox type the name of wireless connection
- Make sure Authentication type is WPA-PSK/WPA2-PSK then type wireless password and click NEXT (and safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

**Quick Start--Wireless Setting**

You may enable/disable Wireless, change the Wireless SSID and Authentication type in this page. Click NEXT to continue.

Access Point:  Activated  Deactivated

SSID:

Broadcast SSID:  Yes  No

Authentication Type :

Password:  (Please enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

**BACK** **NEXT** **EXIT**

- One the Wizard is completed click Next to save configuration

**Quick Start Completed!!**

The Setup Wizard has completed. Click on BACK to modify changes or mistakes. Click NEXT to save the current settings.

**BACK** **NEXT** **EXIT**

- Click close to go back to main page

**Quick Start Completed!!**

Saved Changes!

**CLOSE**