


Dlink DSL-2750U

- Establish a connection between the device and the router via network cable or Wi-Fi
- Open a browser and type 192.168.1.1 in the address bar
- You will be prompted to enter Username: admin and Password: admin

The screenshot shows the login interface of the D-Link DSL-2750U Web Management system. At the top, it displays 'Product Page: DSL-2750U' on the left and 'Firmware Version: AF_1.60_R01' on the right. Below this is a large orange banner with the 'D-Link' logo. The main content area is a white box with an orange header labeled 'LOGIN'. Inside this box, it says 'Welcome to DSL-2750U Web Management'. There are two input fields: 'Username' with a dropdown menu showing 'admin' and 'Password' with a masked field showing 'admin'. Below the password field is a checkbox labeled 'Remember my login info.' and a 'Login' button. At the bottom of the page, there is a dark grey banner with the word 'WIRELESS' in white capital letters.

- After logging in , Click Setup
- Click Wireless Connection then Wireless Connection Setup Wizard

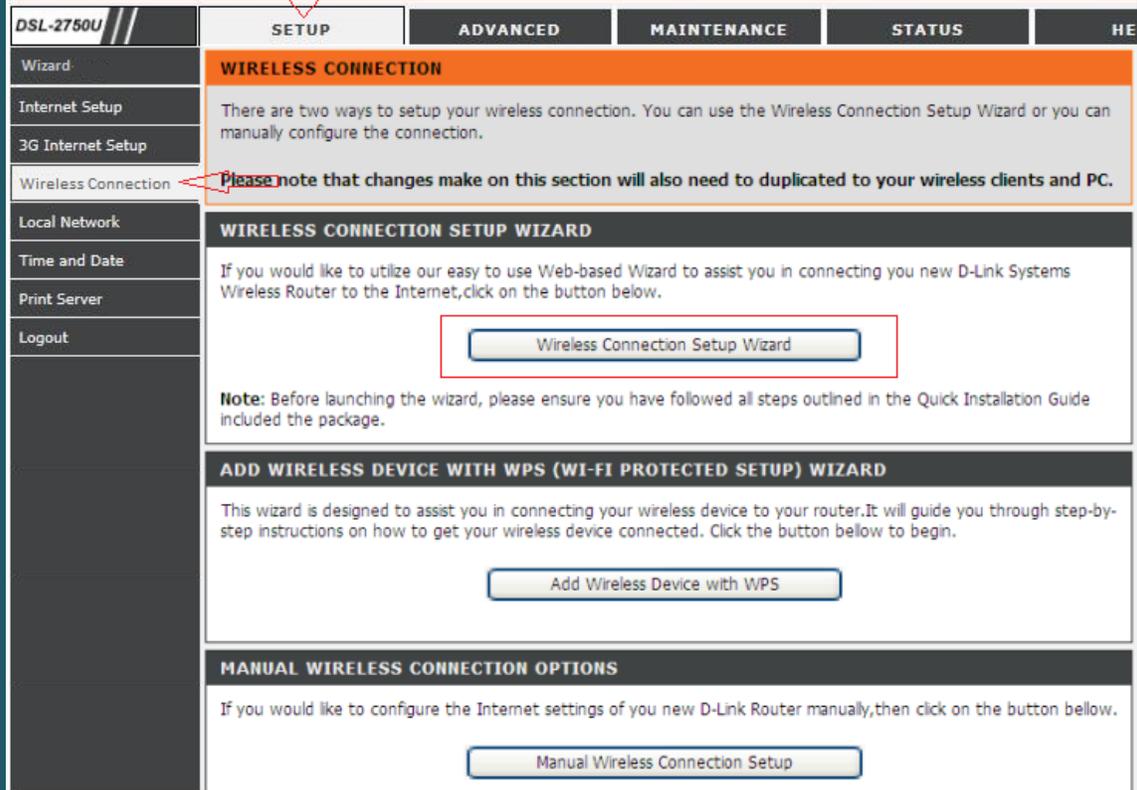

DSL-2750U //

WIZARD

Internet Setup

3G Internet Setup

Wireless Connection

Local Network

Time and Date

Print Server

Logout

SETUP ADVANCED MAINTENANCE STATUS

WIRELESS CONNECTION

There are two ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.

Please note that changes made on this section will also need to be duplicated to your wireless clients and PC.

WIRELESS CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.

Wireless Connection Setup Wizard

Note: Before launching the wizard, please ensure you have followed all steps outlined in the Quick Installation Guide included in the package.

ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP) WIZARD

This wizard is designed to assist you in connecting your wireless device to your router. It will guide you through step-by-step instructions on how to get your wireless device connected. Click the button below to begin.

Add Wireless Device with WPS

MANUAL WIRELESS CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Manual Wireless Connection Setup

- In Network Name SSID type then new Wi-Fi Name
- Select "Use WPA encryption instead of WEP" and "Manually assign a network key", then click "Next"

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Give your network a name, using up to 32 characters.

Network Name (SSID):

Automatically assign a network key (Recommended)

To prevent outsiders from accessing your network, the router will automatically assign a security key (also called WEP or WPA key) to your network

Manually assign a network key

Use this option if you prefer to create your own key

Use WPA encryption instead of WEP (WPA is stronger than WEP and all D-Link wireless client adapters support WPA)

- In Network Key enter the new Wi-Fi password and click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

The WPA (Wi-Fi Protected Access) key must meet one of following guidelines.

- Between 8 and 63 characters (A longer WPA key is more secure than a short one)
- Exactly 64 characters using 0-9 and A-F

Network Key :

- Click Save

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference

Network Name (SSID) : **dlink**

Wireless Security Mode : **WPA-PSK TKIP**

Network Key: **123456789**