


Zhone 6718-W1

- Establish a connection between the device and the router via network cable or Wi-Fi , in case you want to use a cable you have to assign a static IP on computer since DHCP is disabled by default
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar
- You will be prompted to enter username and password , Username should be admin and Password : admin+ last 6 characters of modem's serial number



- Expand Wireless tab and click Basic to modify wireless name
- In SSID textbox type the wireless name

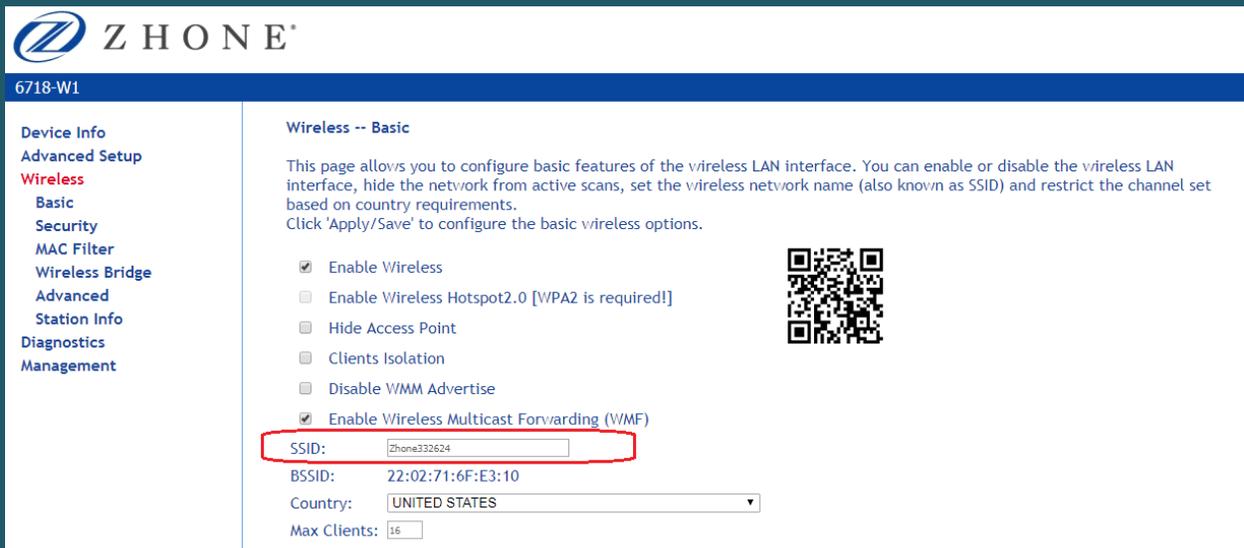

- Click security to change wireless password
- Make sure Network Authentication is WPA-PSK or WPA2-PSK
- In WPA/WAPI passphrase type WIFI password and click Apply/Save

Wireless

- Basic
- Security**
- MAC Filter
- Wireless Bridge
- Advanced
- Station Info
- Diagnostics
- Management

WPS Setup

Enable WPS: Disabled ▾

Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength. Click 'Apply/Save' when done.

Select SSID: Zhone332624 ▾

Network Authentication: WPA-PSK ▾

WPA/WAPI passphrase: ***** [Click here to display](#)

WPA Group Rekey: 0

Interval: 0

WPA/WAPI Encryption: TKIP+AES ▾

WEP Encryption: Disabled ▾